




FEATURES

- **Optional module slot**
(JTP-10, JTP-10RDS, JDM-10A, JTM-10, JCDR-10RDS)
- Individual EQ per input.
Input gain control (microphone line inputs 1~3).
- Phantom power switch inputs.
- Input 1 by Combo/RJ45 (JPTT-10B).
- Input 2-3 by Combo (MIC/LINE).
- Input 4-5 by RCA (LINE).
- Pre-amp out / amp-in for extension with power amplifiers.
- Recording output RCA.
- Telephone paging and night ringer.
- Priority-switch on Mic 1, 2, 3
- AC & DC 24V operation.

PACK SERIES

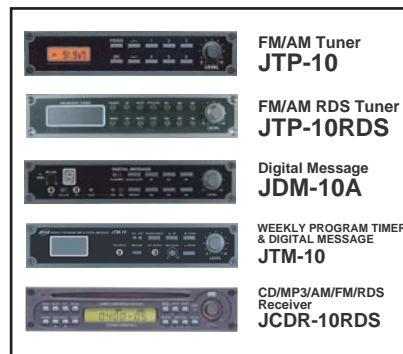

SPECIFICATIONS

Input Sensitivity / Impedance	MIC/LINE1~3 : -50dBu(2.45mV) 5K Ω BAL
	-10dBu(245mV) 5K Ω BAL
	LINE 4~5 : -10dBu(245mV) 15K Ω UNBAL
	TEL PAGING : -10dBu(245mV) 5K Ω BAL
	PACK UNIT: -10dBu(245mV) 10K Ω UNBAL
	REC OUT : 0dBu(775mV) 3K Ω UNBAL
Output Impedance	LOW IMP : 4 Ω
Rated Output	JPA-1120B : 120W(RMS) JPA-1240B : 240W(RMS)
ATT. Step(option)	EUROPE : 100V, 70V, 50V, 25V, 12.5V, 8.9V AMERICA : 70V, 50V, 25V, 12.5V, 8.9V, 6V
Frequency Response(line signal)	LESS THAN -3dB(55Hz ~ 16kHz)
Signal to Noise Ratio	LINE : MORE THAN 80dB("A" WEIGHT) MIC : MORE THAN 70dB("A" WEIGHT)
T.H.D	LESS THAN 1%(1kHz)
Power Consumption	JPA-1120B : 350W JPA-1240B : 630W
1/8 Power Current Draw (120V/230V)	JPA-1120B : 1.6A/0.8A JPA-1240B : 2.8A/1.4A
1/3 Power Current Draw (120V/230V)	JPA-1120B : 2.4A/1.2A JPA-1240B : 4A/2A
Rated Power Current Draw (120V/230V)	JPA-1120B : 3.6A/1.8A JPA-1240B : 6.4A/3.2A
Power source(option)	AC 120V/230V/240V 50/60Hz , DC 24V
Dimensions	(mm) 430(W) X 133(H) X 352(D)
	(inch) 16.9(W) X 5.2(H) X 13.9(D)
Weight (kg/lbs)	JPA-1120B :13/28.7, JPA-1240B :14/30.9

Drawing

